



POL 10/5/11/40



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 20 OCT 2003

WIPO


PC1

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

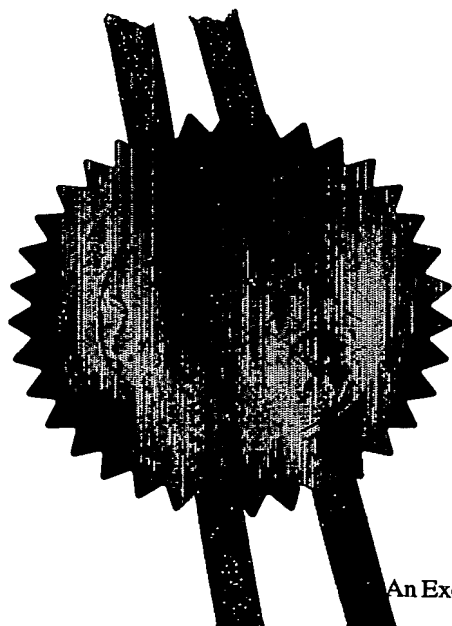

Signed

*H. Behan*

Dated 1 August 2003

**PRIORITY  
DOCUMENT**


SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)



1/77

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

2. Patent application number

(The Patent Office will fill in this part)

0211617.6

3. Full name, address and postcode of the or of each applicant (underline all surnames)

RENISHAW PLC  
NEW MILLS  
WOTTON-UNDER-EDGE

21 MAY 2002

Patents ADP number (if you know it) 2691002

If the applicant is a corporate body, give the country/state of its incorporation

GLoucestershire  
GL12 8JR  
UNITED KINGDOM

4. Title of the invention

MACHINE ADAPTATION

5. Name of your agent (if you have one)

R.D. CAUILL ET AL

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

RENISHAW PLC, PATENT DEPARTMENT  
NEW MILLS  
WOTTON-UNDER-EDGE  
GLoucestershire, GL12 8JR  
7908650001 IT

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form 0

Description 18

Claim(s) 6

Abstract 0

Drawing(s) 16

(40) x 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

0

11.

I/We request the grant of a patent on the basis of this application.

Signature

R.D. CAVILL

Date 20-05-2002

12. Name and daytime telephone number of person to contact in the United Kingdom

A. ILES

01453 524524

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## MACHINE ADAPTATION

This invention relates to the transmission of power and/or data within a machine e.g. a machine tool, and  
5 relates particularly, but not exclusively, to apparatus for the supply of power to and data communication with an electrical accessory e.g. a measurement probe mounted on the machine spindle.

10 When an electrical accessory like a measurement probe is located in a machine tool spindle, normally used for cutters, it becomes difficult to supply that accessory with power and to provide a signal path to and/or from that accessory. Batteries have a limited life,  
15 particularly when wireless transmission of large amounts of probing data to a remote receiver takes place. Also it is undesirable to have extra power supply or data transmission parts fitted around the machine's spindle because these parts can interfere  
20 with cutters subsequently located in the spindle, or these parts may collide with a workpiece or automatic cutter changer mechanism.

One example of a machine which includes parts fitted  
25 around the spindle for supplying power to and signal transmission from the machine is shown in US Patent No. 4,339,714. Other similar devices are shown in US Patent Nos. 5,791,836 and 4,536,661.

30 An arrangement for providing a signal path within a machine tool is disclosed in US 5109223. The disclosure shows a machine tool body having a signal path to a rotatable spindle in the form of a first inductive link. Also shown is a second inductive link between the

spindle and a measurement probe across the widest portion tapered shank (5). A probe is mounted to the shank.

- 5 The arrangement of the second link in that patent is not suited to modern machine tools because the wide area at the base of the taper is highly stressed when cutters are being used, due to e.g. high cutter side loading and high spindle speeds. The position of this  
10 second link means that it is likely to be knocked by cutter shanks being inserted and removed from the shank holder. Thus it would be difficult for a machine tool manufacturer to successfully adapt his existing machine design to incorporate the arrangement illustrated.  
15 Likewise a new design would require additional strengthening to compensate for the weakness created by the second inductive link illustrated.

Furthermore the links will not transmit enough power if  
20 they are too small. So it seems that it is a necessity to position the second link at the larger end of the tapered shank in order to maximise its size. Moreover, use on small tool shanks (30mm diameter or less say) would not be a practical proposition because the link  
25 at the shank would be far too small to transmit enough power.

For an inductive link to function effectively the ferrite elements mentioned in US 5109223 should not be  
30 separated by magnetisable material (e.g. the metal surface of the shank). Consequently an interruption in the surface of the shank would have to be made at the link on the shank for effective operation. Such an interruption would have to be sealed. Sealing of

non-metallic parts to metallic parts is very difficult in the machine tool operating environment at the stressed position indicated.

- 5 The arrangement of Fig 1 in that document requires relative orientation between the tool shank and the spindle. Such orientation is not always possible on machine tools. The arrangement of Fig 2 requires an annular recess in the shank at the aforementioned  
10 highly stressed location.

The transmission of power to the probe is not contemplated in US 5109223.

- 15 According to a first aspect of the present invention there is provided a machine comprising a stationary part and a rotatable part the rotatable part having a shank receiving area for accepting the shank of a machine accessory, and comprising a first electrical  
20 link between the stationary and rotatable parts and a portion of a second electrical link at the shank receiving area being in electrical communication with the first link for providing in use a disconnectable electrical link between the rotatable part and the  
25 shank of the accessory, wherein the portion of the second link is in the form of at least one contact.

- According to a second aspect of the invention there is provided a machine comprising a stationary part and a  
30 rotatable part the rotatable part having a shank receiving area for accepting the shank of a machine accessory, and comprising a first electrical link between the stationary and rotatable parts and a portion of a second electrical link at the shank

receiving area being in electrical communication with the first link for providing in use a disconnectable electrical link between the rotatable part and the shank of the accessory, wherein the receiving area is  
5 in the form of a cavity having an opening and a rear area furthest from the opening and wherein the second link is disposed closer to the rear area than to the opening.

10 In this description a contact which provides physical contact and thus has a conductive path across the link for electricity. The first link is described as the first element in the description and the second link is described as the third element.

15 According to a third aspect of the invention there is provided a shank, adapted for use with the machine tools of the first or second aspects, for an accessory.

20 According to yet another aspect of the invention there is provided an accessory having a shank according to the third aspect.

Preferably the links mentioned above are used to supply  
25 power to the accessory. Preferably the links are used to transmit signals to and/or from the accessory.

The invention will now be described with reference to the drawings, wherein:

30 Fig 1 shows a typical arrangement of a machine tool spindle adapted for the supply of power to, and data transmission both to and from an accessory mounted thereon;

Figs 2-11 show various embodiments of apparatus

for supplying power to the spindle, and for transmitting data to or receiving data from the spindle;

5 Figs 12 and 13 show apparatus for carrying power and signals along a spindle; and

Figs 14-23 show various embodiments of apparatus for supplying power or receiving/transmitting data from a spindle to an accessory mounted in the spindle.

10 Referring to Fig 1, part of a machine tool 200 is shown having a spindle 210 driven directly by motor 220. A cavity or shank receiving area in the form of a tapered housing 230 in the spindle 210 is used to hold a cutter or, as in this illustration, a measurement probe 100.

15 Modern machine tools have automatic cutter changers. Others accessories can be used also in place of a cutter. All will be mounted on a standard tool shank 360. Most standard tool shanks are of tapered (frustum) configuration. With this invention a carousel of

20 cutters together with one or more accessories will be used and selection of the correct cutter/accessory will be made by a program. When a measurement operation is to be performed then an accessory in the form of a measurement probe will be selected from the carousel

25 and automatically fitted into the spindle. The machine can be moved into the desired location and the workpiece can be measured, either by translational movement of the spindle or (if the probe itself can move) by keeping the spindle stationary and

30 manipulating the probe.

In order to provide power and a signal path to the measurement probe 100 or other accessory on the machine tool 200 via rotary components (in this case spindle



210) three elements are required. The first element is an electrical link between the stationary machine 200 and the spindle 210 for providing power and/or signal connections across a rotary interface, the second is a path along the spindle 210, and the third element is a disconnectable electrical link from the spindle to the probe 100 or other accessory at the shank receiving area 230.

10 There are a number of positions at which this first element (variants of which are described in detail below) may be positioned, examples of which are shown in Fig 1 as circled references 1a,1b,1c and 1d. Position 1a has been illustrated schematically in chain-dotted lines and provides a rotary link giving a signal path S, power supply P and (in this instance) a chassis return E.

Reference 1b shows another possible position for the first element. In position 1b it is likely that the link between the machine and its spindle will be formed within the motor 220 and take the form of a stator and rotor coil as described below.

25 References 1c and 1d show other possible positions for the first element which may take the form of any of the links described below with the benefit of complete enclosure.

30 Reference 2 indicates the second element i.e. the power and signal path along the spindle joining the first and third elements. Alternative embodiments for this part are described below.

Reference 3 likewise indicates the position of the third element i.e. the link between the spindle 210 and probe 100 or other accessory. Alternatives for this part are described below also.

5

Figs 2-11 show various ways of providing power and signal links from the static machine 200 to a rotating part, in this case spindle 210.

- 10 Fig 2 shows a slip ring arrangement having two rings 222 and two wipers 225, one supplying power combined with a signal (P+S) and one forming a common return E. The power and signal supply is intended to be transmitted via an insulated path I along the spindle  
15 and the common return E is formed by the remainder of the spindle. Three or more slip rings could be used e.g. for separate power and signal paths.

- Fig 3 shows another machine to spindle link in the form  
20 of an inductive rotary transformer. In this variant an alternating current is passed through static transformer windings 235 and is picked up by rotary coil 230. One set of windings only is used in this arrangement but more may be used e.g. a pair of sets.  
25 In the present arrangement the power and signal P and S are combined in one alternating current sent to accessory 100 via insulated spindle track I, and returned via spindle path E. This rotary transformer is more robust when very high spindle speeds are used  
30 e.g. 50,000 rpm, because the coils of the transformer will be pushed centripetally against side walls 250 in use. These walls will support the coils during rotation.

Fig 4 shows another machine to spindle link in the form of a single coil rotary transformer which has an axially spaced stator 245 and rotor 240. This arrangement operates in a similar manner to the rotary transformer shown in Fig 3.

Fig 5 shows a machine to spindle inductive link in the form of a multiple coil rotary transformer having rotary and stationary parts 252 and 253 respectively. In use a separate power and signal path can be utilised, in which case two insulated paths IP and IS will be required on the spindle. A common spindle return E is used here.

Fig 6 shows another machine to spindle link this variant employs a rotary transformer having a stator 265 and a rotor 260 in combination with a capacitance link which likewise has a stator part 275 and a rotor part 270. A signal S is passed via the capacitance link and power is supplied via the rotary transformer. The spindle has two insulated paths IS and IP and a common return E.

Fig 7 shows a machine to spindle link which is solely capacitive. A stator 290 is shown and a rotor 295. In this example there is a power path P-IP and a separate signal path S-IS as well as a common return E. The power path will have to have a relatively high capacitance and so the surface area of the capacitive plates 280 should be larger in comparison to the area of the signal path plates 285.

Fig 8 shows another capacitive machine to spindle link. This variant has radially extending plates 297/300 to

provide more surface area than might be achievable with the circumferentially extending plates illustrated in Figs 6 and 7. This example functions in the same manner as the capacitive link shown in Fig 7 and  
5 described above. Shown is a stator 297 and a rotor 300.

Fig 9 shows yet another machine to spindle link. In this example a rotary transformer 310 is used for power transmission. A signal path IS is provided by an  
10 optical fibre 315 in the spindle co-operating with an optical machine module (OMM). The signal path in the spindle is via the optical fibre 315 which rotates in use. A small gap for light to cross is present between static OMM and rotary parts of the spindle. Thus a  
15 rotary link is formed for a signal. An optical transceiver in the spindle or accessory may be provided for two-way communication along the fibre 315.

Figs 10 and 11 show examples of optical fibre to OMM  
20 links. Fig 10 shows a fibre 315 which can transmit and/or receive data via a static axial emitter/sensor 320. Fig 11a shows a y-shaped fibre 315 which can transmit and/or receive data via a ring of static emitters/sensors 325 disposed circumferentially about  
25 the ends of the y-shaped fibre 315. Fig 11b shows a fibre 315 merging into a disk 316 which again can transmit and/or receive data via a ring of static emitters/sensors 325.

30 The electrical link shown in Fig 2 is a contact link whereas the electrical links shown in Figs 3-11b are all non-contact links.

Figs 12 and 13 illustrate examples of the second

element and show sections through spindle 210, having a draw-bar bore 330. Each Figure shows two insulated paths IS and IP for signal and power respectively, as well as a common return E formed by the remainder of the spindle. Two wires are used in these examples for dynamic balancing of the spindle. A combined signal and power path might be used so one wire only would then be required. A counterweight or asymmetric section might be used to provide a balanced shaft if only one wire was present. Shown are two insulated wires but more than two wires may be used. Alternatively or additionally one or more optical fibres may form the required signal path. Optical fibres may be omitted entirely, so a straight line light path may be provided between the machine to spindle link and the electrical device.

The electrical paths IS and IP may be formed by any distinct conductive path e.g. by flexible conductive strips possibly in a groove or grooves, or curled up inside the central draw-bar bore 330. The power and signal paths may be formed by an insulated draw-bar, a discrete strip of conductive plating formed on the spindle or draw-bar, or concentric insulated tubes within the spindle or within the draw-bar.

Figs 14a,b and c show an example of a third element of the invention i.e. the disconnectable link between the spindle and the electrical device. Fig 14a is a cross-section through the end of spindle 210 showing a probe 100 within the tapered housing of the spindle. Fig 14b is an enlarged partial view of Fig 14a and Fig 14c is a section through the spindle 210 at 14c-14c in Fig 14a.

In this example probe 100 is supplied with power as well as a signal path via a spring-loaded contact 340 at the spindle in communication with an insulated circumferential track 350 on the probe 100. The tapered fitting of the probe allows direct contact of the probe with the spindle e.g. at surface 360 thus providing a common chassis return for the power and signal.

Alternative positions for the spring contact 340 are shown at A. In this example only one spring contact 340 is shown. However, for balance a dummy contact 345 (Fig 14c) might be employed. Further, more than one spring contact 340, in combination with two or more insulated circumferential tracks 350 may be used e.g. for separate power and signal paths.

Fig 14c shows a variant of the probe illustrated in Figs 14a,b&c. In this variant, instead of insulated track S, the shank 360 of the probe is divided (into quadrants 61,62,63 & 64 in this instance). Each division has its own sprung contact as described immediately above. Such a contact will be disposed in the position shown in Fig 14a or the positions A.

25

Instead of tracks 350 the shank might be divided by insulating tracks 361 into a number of discrete areas e.g. the quadrants 61,62,63 and 64 shown in Fig 14d. In this instance four contacts would be arranged on the spindle at 90° to each other so that they coincided with the quadrants.

30

Fig 15 shows two alternative spindle to probe links. In this illustration one example is shown on the left

side of the centre line and a second example is shown on the right side of the centre line. In each case electrical insulation between parts is indicated by thick lines.

5

On the left side a combined signal and power path IS/IP is shown incorporated into a draw-bar 333. An insulated portion of the draw-bar 335 in use contacts an insulated section 334 of the probe 100. Thus the  
10 path of the power and signal is kept electrically separated from the remainder of the spindle, draw-bar and probe. The chassis forms the return path E. On the right side are shown separate signal and power path IS and IP. In this example the draw-bar 333 has  
15 two insulated portions 336 and 337. These portions are in communication with an insulated element 338 and a spring contact 339 respectively each on the probe 100. Again electrically separated paths are formed between the signal draw-bar and the probe and the chassis forms  
20 the return path E.

Fig 16a shows an alternative link from the spindle to the probe. In this example use is made of a coolant channel 331 within the draw-bar 333. This channel is  
25 unused when the probe 100 is mounted in the spindle. The channel incorporates, in this example, two rings 366 and 367 which co-operate with two spring contacts 368 and 369 mounted on a plug 365 which blocks the coolant channel 331. Wiper ring 370 acts to remove any  
30 coolant from the rings 366 and 367 when the probe is inserted into the spindle, and prevents drips reaching the contacts during operation of the probe. A chassis return E is used in this example also. Fig 16b shows an enlargement of the parts of the link.

Fig 17 shows yet another example of a link to the probe from the spindle. In this example separate signal and power paths are provided. Draw-bar 330 has concentric inner and outer parts 330S and 330P respectively, which are insulated from each other and from the spindle 210. Thus the inner part of the draw-bar 330S provides a signal path and the outer part 330P provides a power path, while the spindle forms a return. Ring 367 on the inner draw-bar part, in use, is in electrical communication with spring contact 369 on the probe, thus linking the draw-bar and the probe with a signal path. Insulated portion 335 on the outer draw-bar part in use, is in electrical communication with insulated section 334 on the probe and links also the draw-bar and the probe with a power path. The spindle forms a chassis return.

The links shown in Figs 14a to 17 are contact links, but the spindle to probe electrical link may be non-contact e.g. capacitive or inductive and may take the form similar to the links described for the first element, as illustrated in Figs 3 to 9.

Fig 18 shows an embodiment having first(1d), second(2) and third(3) elements at the base of the machine 200 illustrated in Fig 1. In more detail there is shown an inductive link 10 providing power and signal transmission between machine 200 and spindle 210. A path through the spindle, for the power and signal, is provided in the location of the dotted line P/S. The tapered housing 230 of the spindle 210 incorporates resilient contacts 18 that communicate electrically with complementary contacts 20 on tapered shank 360. The complementary contacts 20 are electrically



connected to the accessory 100 to be fitted to the shank 360.

It will be noted that the link between the spindle and the shank is positioned at the rear of the shank housing 230. In that position the link e.g. the contacts, in the housing is unlikely to be damaged when cutters or accessories are inserted or removed from the housing. Also the stresses in the spindle are far less than they are at the front of the housing so a larger link can be used and there is no risk of mechanical failure of the spindle. The advantages mentioned above arise when the link (not necessarily of the contact type) is positioned in the rear third of the housing. However, those advantages are evident when the link is placed in the rear half of the housing. Use of contacts allows a greater transfer of power between the spindle and shank than can be achieved with the same size non-contact link.

20

A scheme of the electrical paths for this embodiment is shown in Fig 23 and is described below.

Fig 19 shows shank 360, spindle mounted contacts 18 and shank contacts 20. In this embodiment the contacts are two sets of "C" shaped rings 21/22 & 24/25 of sprung metal, each forming part of an electrical path to an accessory 100 (not shown). Rings 22,24 are mounted to the shank in a resilient electrically insulating material 26 e.g. an elastomeric material like vulcanised rubber or flexible polyurethane. The spindle contacts are situated toward the top of the tapered portion of the shank for. The spindle contacts 21/25 are mounted in a non-conductive plastics block, in two

pairs on each side of the shank. They extend in an arc of approximately 10-20° around the rings 22/24. A complete ring around the shank is possible also. The electrical path to an accessory to be mounted to the shank is via conductors in through-holes in the shank (not shown). The shank shown in Figs 18&19 has the proportions of what is known as a BT40 type shank.

Fig 20 shows a similar configuration to the embodiment shown in Figs 18&19. The shank illustrated in Fig 20 is what is known as an HSK shank, otherwise the arrangement of the parts is similar to that shown in Fig 18. The arrangement of the contacts 28/30 is similar to the contacts shown in Figs 18&19. They are constructed from the same materials and they are situated in the same place and therefore have the same advantages as the contacts mentioned immediately above. The contacts are shown in more detail in Figs 21 and 22.

Fig 21 shows a (HSK) shank 360 and accessory (probe) 100 attached thereto. Contact pair 30 is shown having conductive tracks 24 mounted in a non-conductive elastomeric material 26. A similar pair (not shown) is disposed on the opposite side of the shank so that they would align axially at the position 21. Again communication to the accessory 100 is via internal trough-holes.

Fig 22 shows a detail of the contacts 28/30 illustrated in Fig 20. A "C" shaped plastics block 29 on each side of the spindle 210 houses contacts 28 formed by a pair of sprung metal "C" shaped rings 25 which communicate with contacts 24 on the shank. A similar contact block

transmission module enables the probe to be more compact; an operator is not required to change batteries;

the contact, inductive or capacitive signal links  
5 described are less likely to suffer external interference than radio or light data transmission systems used outside the machine's spindle;

since no parts external to the machine are used then, when the probe is not in use, there are no  
10 residual parts to interfere with the other operations of the machine.

Whilst power supply together with signal paths have been described and illustrated it will be apparent that  
15 the invention extends to the provision of power alone, the provision of a signal path alone (to an electrical device, from that device, or both ways) or the provision of both power and a signal path.

20 Whilst the invention has been described with reference to its application to a machine tool and measurement probe, it has many other applications and so is not intended to be limited to this field. For example the invention may find use in any machine which is adapted  
25 to accept an electrical device at a rotary machine part and which is capable of supplying power or a signal path to or from the device.

Examples of accessories other than probes that may be  
30 used with the rotary part described include: a robotic gripper or workpiece manipulator; a laser deburring tool (possibly articulatable); a laser driller/profiler/engraver/surface hardener; a camera. e.g. for measuring surface finish or for monitoring

tool breakage; adjustable size tooling, workpiece cleaners (e.g. vacuum cleaners); electromagnets; or high speed motors (e.g. for deburring use).

- 5 Examples of different probes that might be used include: scanning probes e.g. analogue probes or data streaming probes; touch trigger probes; non-contact probes e.g. camera or laser probes or surface texture probes. Additionally probes could be articulated by  
10 mounting a movable probe head to the shank mentioned above.

There are presently several standard tool shank designs i.e. the part of the tool which fits into the end of a  
15 machine tool's spindle. The probe 100 shown in Figs 1&14-23 illustrates only two types of shank (HSK & BT40). As a consequence any accessory used in place of the tool e.g. a probe, may require several different shanks to fit all the machines which have spindles  
20 adapted to supply power or to carry a signal. Thus a feature of this invention is the shank itself, which, whilst illustrated as being integral with the probe in some Figs may be a separate item which is selectable from a number of designs to suit the machine on which  
25 the accessory is to be used, but which will have the ability to transmit power to the accessory and/or will provide a signal path.

## CLAIMS

1. A machine comprising a stationary part and a rotatable part the rotatable part having a shank receiving area for accepting the shank of a machine accessory, and comprising a first electrical link between the stationary and rotatable parts and a portion of a second electrical link being in electrical connection with the first link at the shank receiving area for providing in use a disconnectable electrical link between the rotatable part and the shank of the accessory, wherein the portion of the second link is in the form of at least one contact.
2. A machine according to claim 1 wherein the first link and the portion of the second link are arranged to transmit either power or signals, or both power and signals.
3. A machine according to claim 1 or 2 wherein the first link and the portion of the second link each have two paths, one for the transmission of power and the other for the transmission of signals.
4. A machine according to claim 1,2 or 3 wherein the first link is an inductive link having complementary inductors which in use of the machine have relative displacement, one of the inductors being mounted to the rotatable part and the other of the inductors being mounted to the stationary part.
5. A shank for mounting an accessory to the machine claimed in any one preceding claim comprising another portion of the second electrical link in the form of a

further contact or contacts.

6. An accessory having a shank according to claim 5, the accessory being supplyable with power, or having a signal path, or both, via the portion of the second electrical link of the shank.

7. A machine comprising a stationary part, a rotatable part the rotatable part having a shank receiving area, a shank for a machine accessory mountable to the rotatable part at a shank receiving area, and comprising a first electrical link between the stationary and rotatable parts and a second electrical link at the shank receiving area being in electrical communication with the first link for providing in use a disconnectable electrical link between the rotatable part and the shank of the accessory, wherein the second link is formed as two portions, one portion being mounted to the shank the other portion being mounted to the rotatable part the two portions providing the disconnectable electrical link between the shank and the rotatable part wherein each portion has at least one complementary contact for electrical communication between the two portions.

8. A machine according to claim 7 wherein either one or both of the or each complementary contacts is resiliently mounted.

9. A machine according to any one of claims 1-4 or 7-8 wherein the receiving portion is in the form of a cavity having an opening and a rear area furthest from the opening and wherein the second link is disposed closer to the rear area than to the opening.

10. A machine according to claim 9 wherein the second link is disposed at the rear third of the cavity.


**CLAIMS**

1. A machine comprising a stationary part and a rotatable part the rotatable part having a shank  
5 receiving area for accepting the shank of a machine accessory, and comprising a first electrical link between the stationary and rotatable parts and a portion of a second electrical link at the shank receiving area being in electrical communication with  
10 the first link for providing in use a disconnectable electrical link between the rotatable part and the shank of the accessory, wherein the receiving area is in the form of a cavity having an opening and a rear area furthest from the opening and wherein the second  
15 link is disposed closer to the rear area than to the opening.
2. A machine according to claim 1 wherein the second link is disposed in a third of the cavity which  
20 contains the rear area.
3. A machine according to claims 1 or 2 wherein the first and second links are arranged to transmit either power or signals, or both power and signals.  
25
4. A machine according to claims 1-3 wherein the first link and the portion of the second link each have two paths, one for the transmission of power and the other for the transmission of signals.  
30
5. A machine according to any one preceding claim wherein the first link is an inductive link having complementary inductors which in use of the machine have relative displacement.




6. A shank for mounting an accessory to the machine claimed in any one preceding claim comprising another portion of the second electrical link.
- 5 7. A machine accessory having a shank according to claim 7, the accessory being supplyable with power, or having a signal path, or both, via the shank.
8. A machine accessory according to claim 7 wherein  
10 the accessory is a measurement probe.
9. A machine comprising a stationary part, a rotatable part the rotatable part having a shank receiving area, a shank for a machine accessory  
15 mountable to the rotatable part at the shank receiving area, and comprising a first electrical link between the stationary and rotatable parts and a second electrical link at the shank receiving area being in electrical communication with the first link for  
20 providing in use a disconnectable electrical link between the rotatable part and the shank of the accessory, wherein the receiving area is in the form of a cavity having an opening and a rear area furthest from the opening and wherein the second link is  
25 disposed closer to the rear area than to the opening.
10. A machine according to claim 9 wherein the second link is a contact link formed as at least one pair of contacts, one of the or each pair being mounted to the  
30 shank the other of the or each pair being mounted to the rotatable part for complementary electrical communication between the or each pair.
11. A machine according to claim 10 wherein either one


or both of the or each pair of the contacts is resiliently mounted.

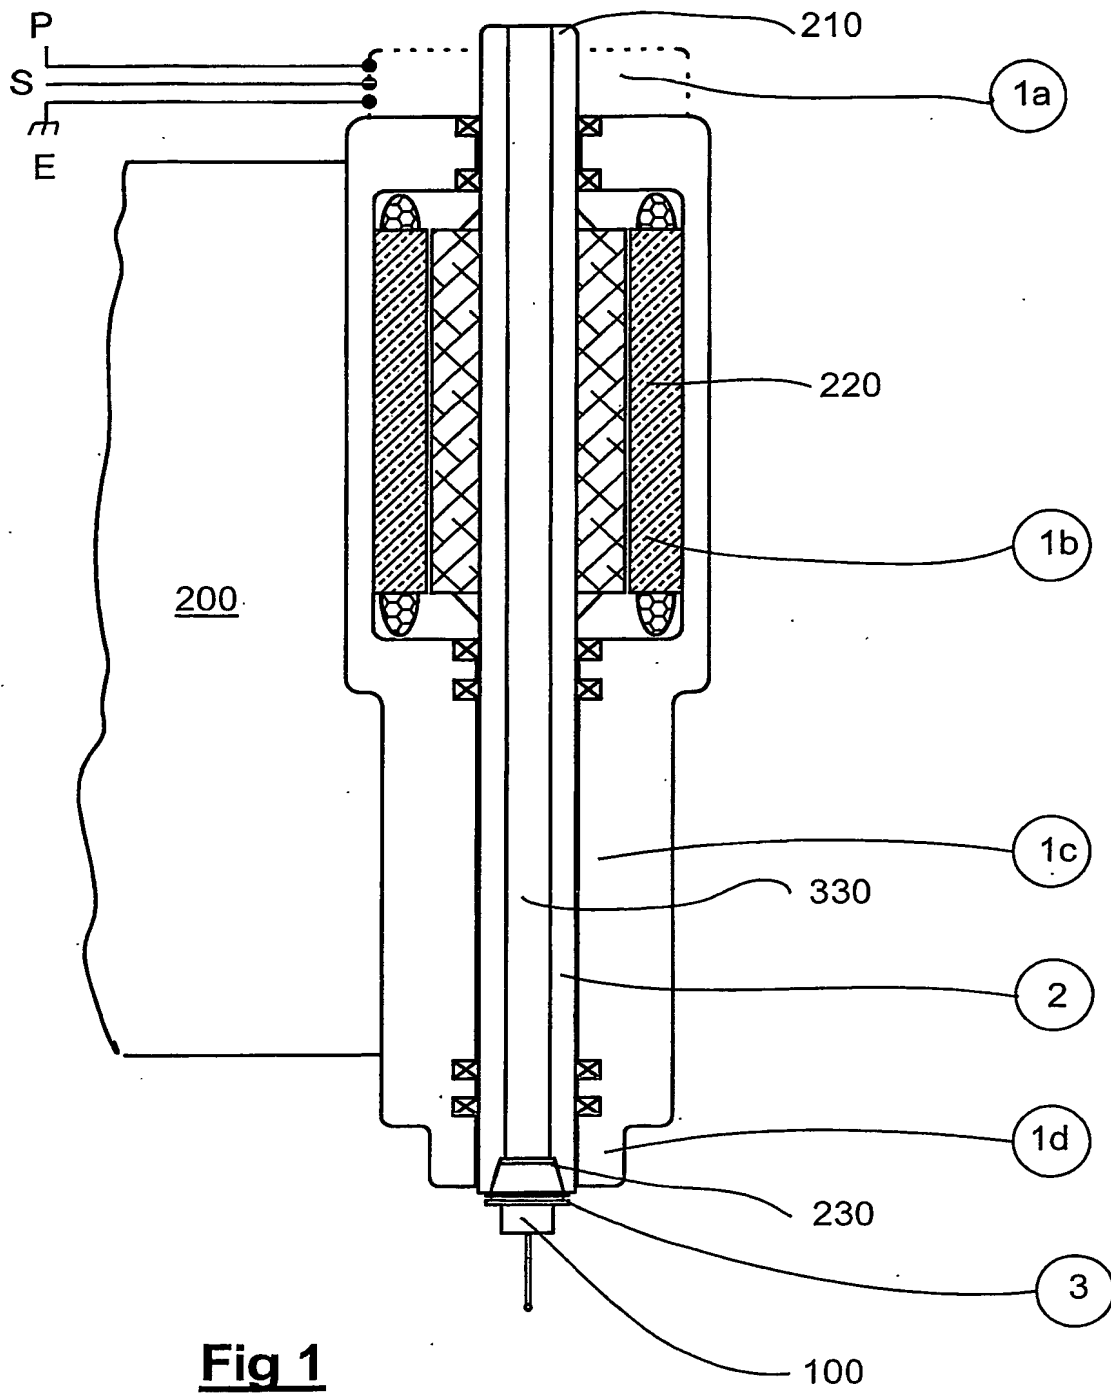


**Fig 1**

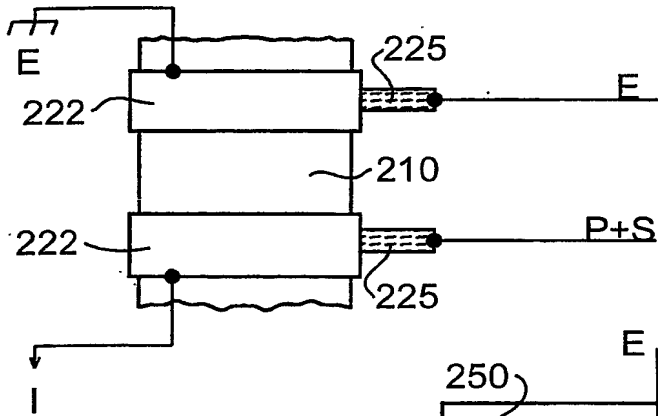


**Fig 2**

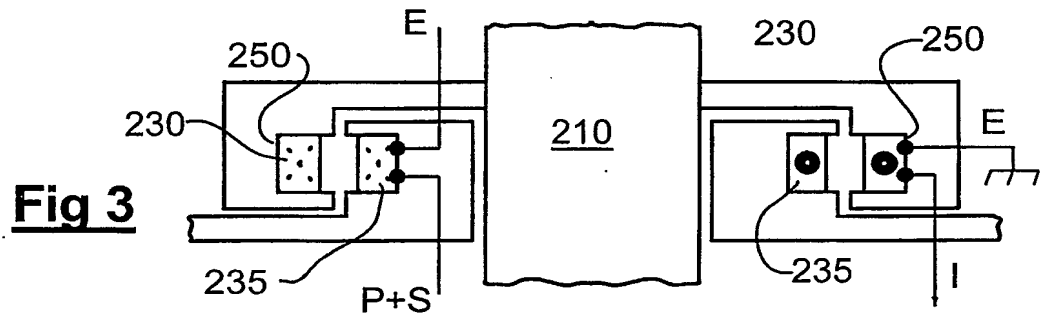




**Fig 3**

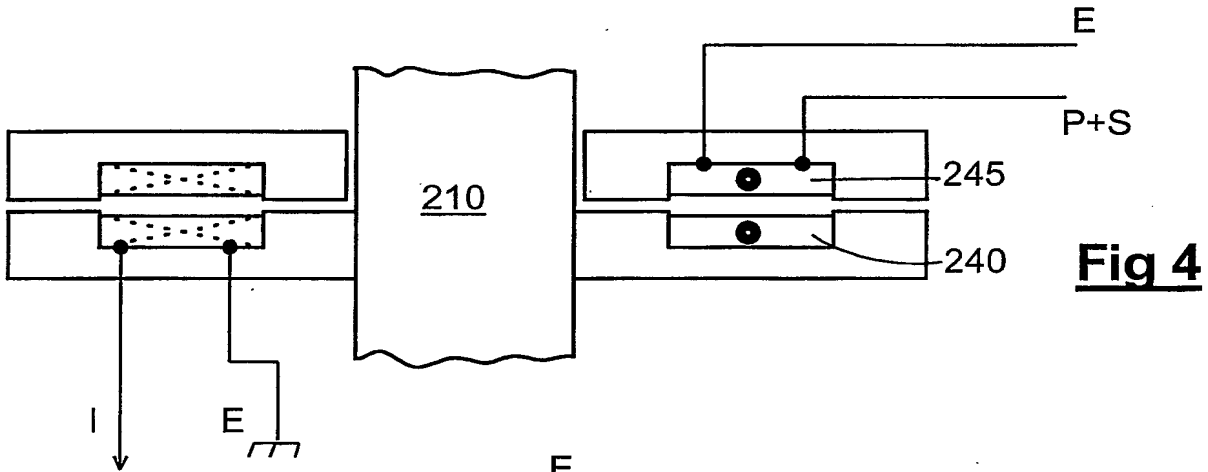


**Fig 4**

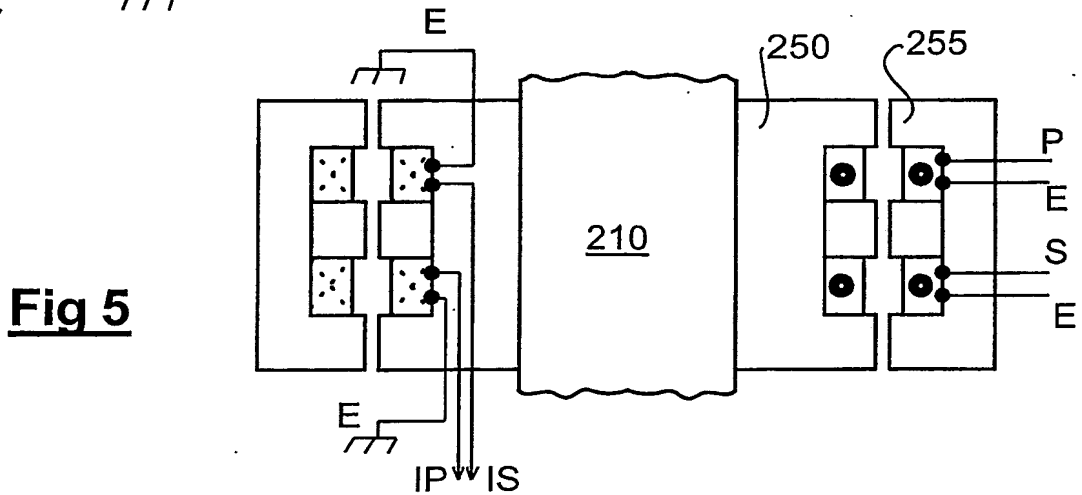



**Fig 5**

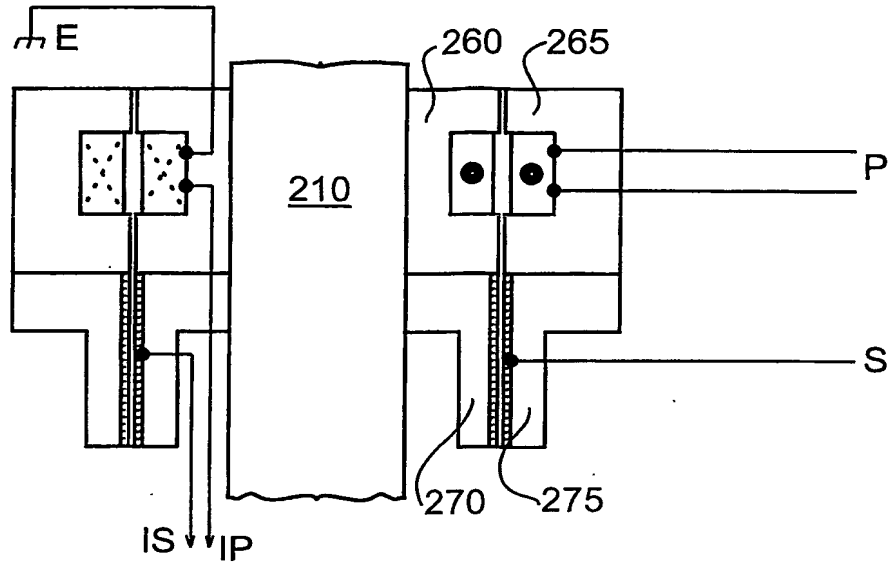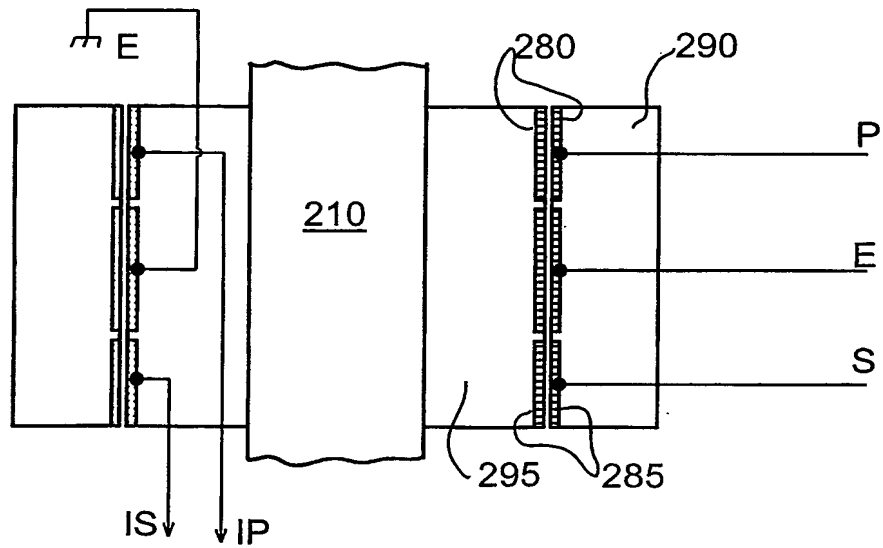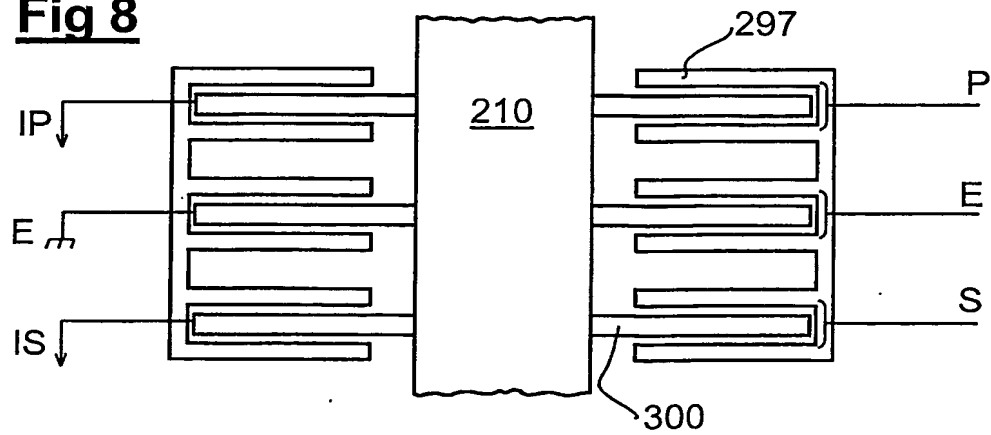**Fig 6****Fig 7****Fig 8**


**Fig 9**

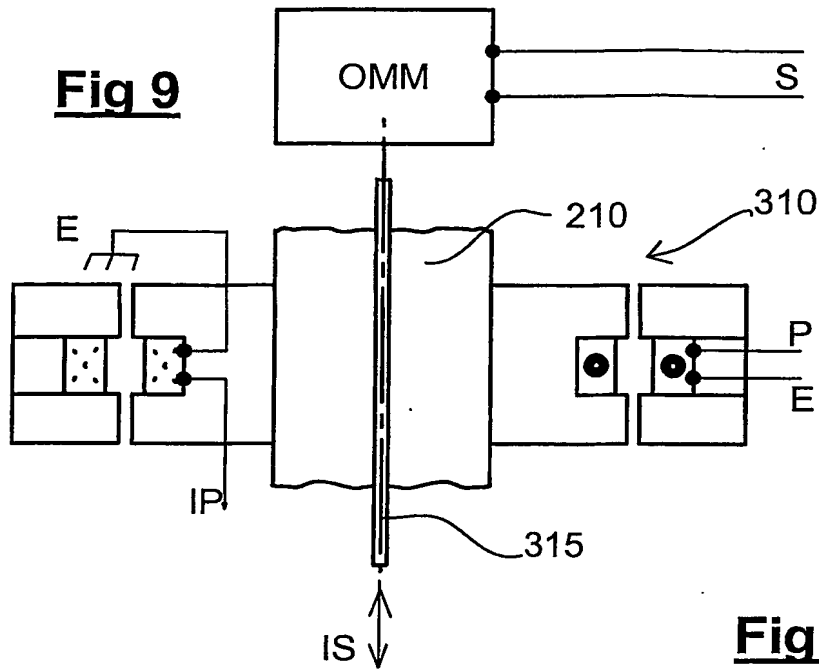

**Fig 10**

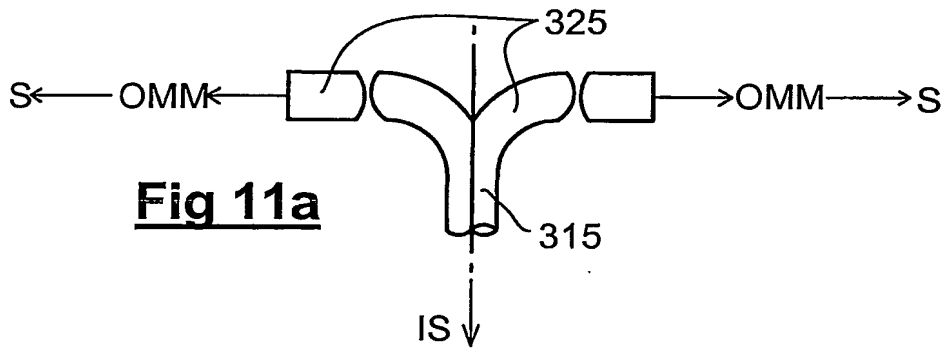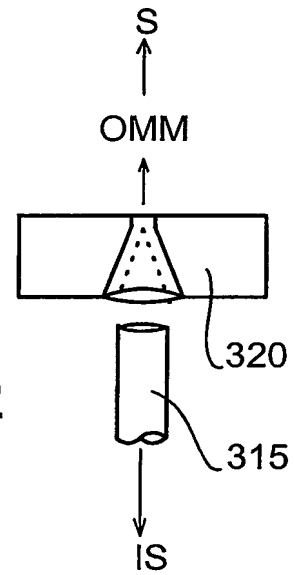


**Fig 11a**

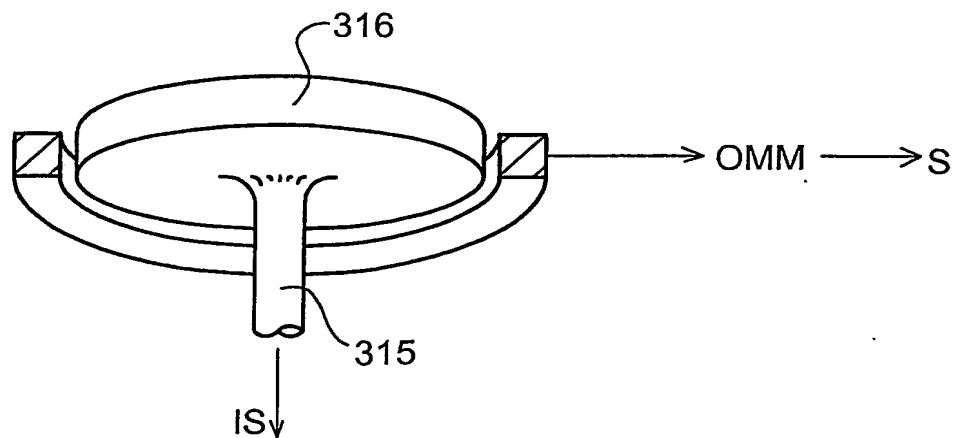


**Fig 11b**

5/16

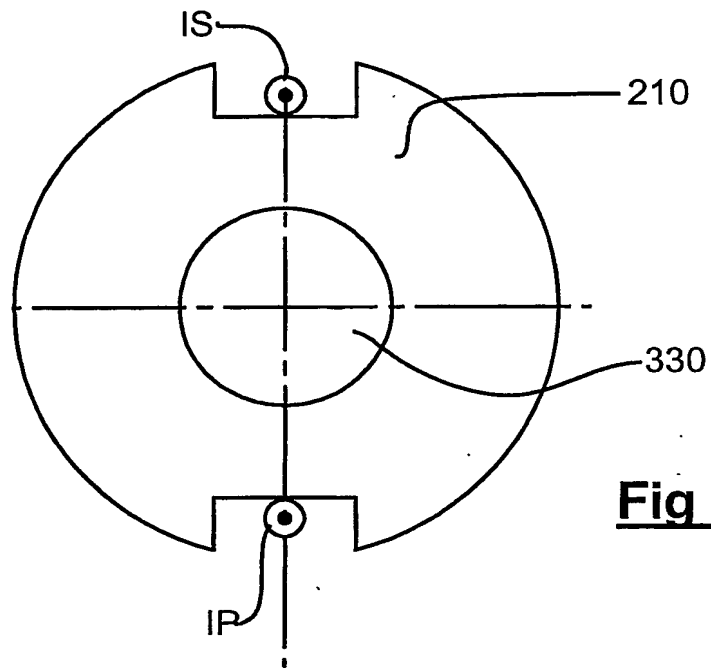


**Fig 12**

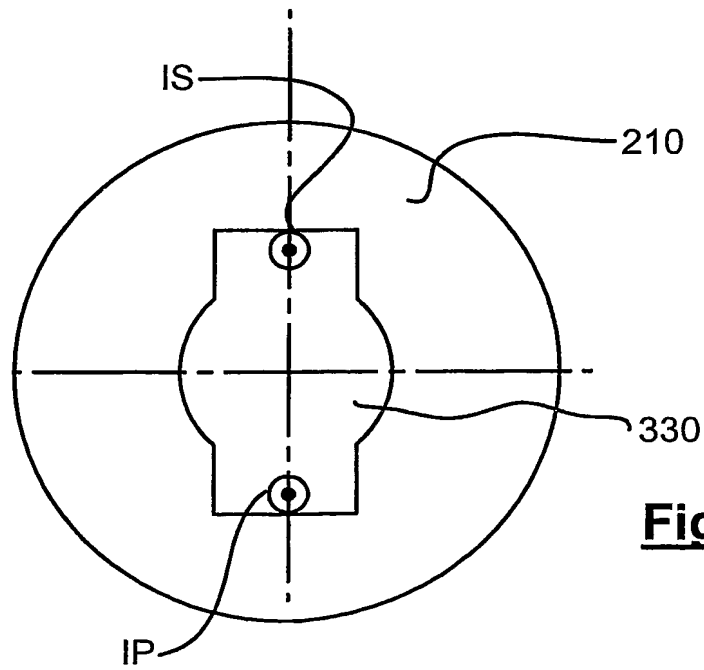


**Fig 13**


6/16

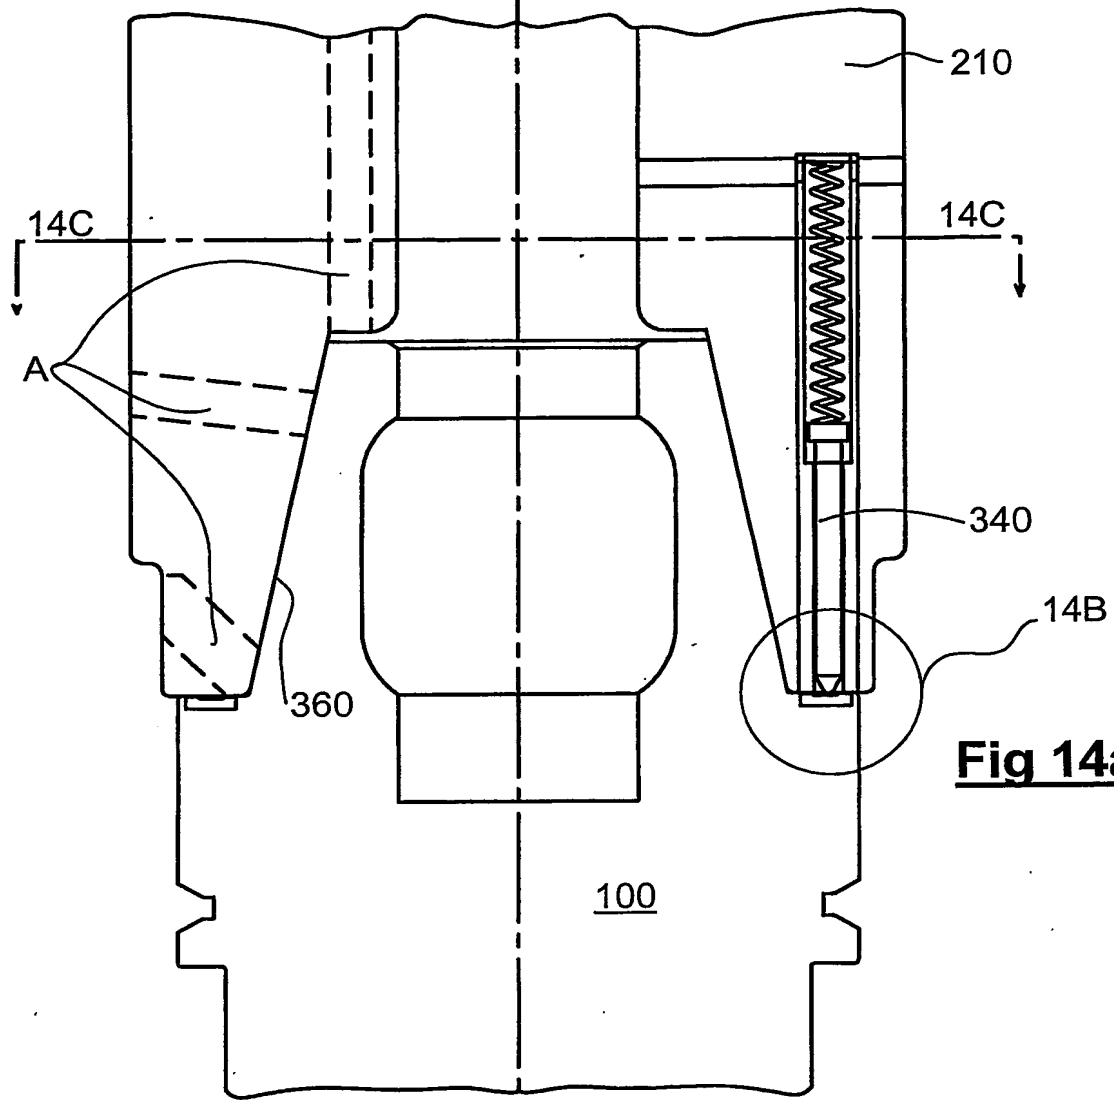

**Fig 14a**

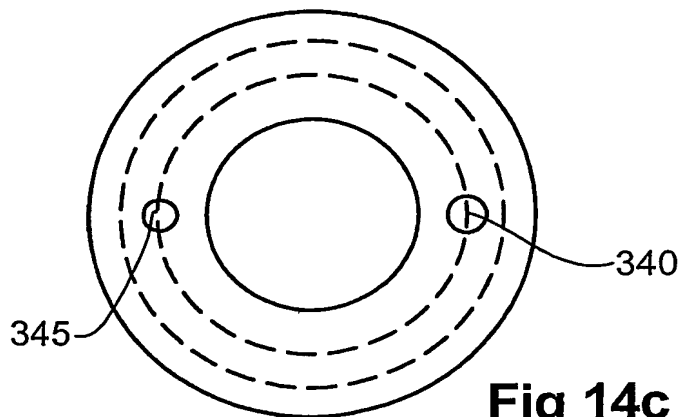


**Fig 14c**

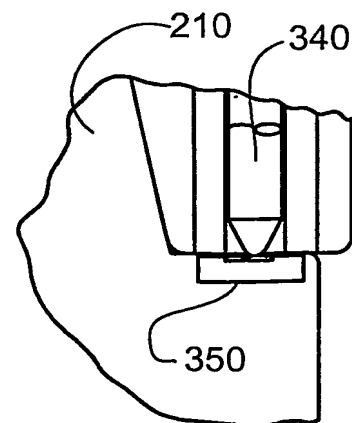

**Fig 14b**




7/16

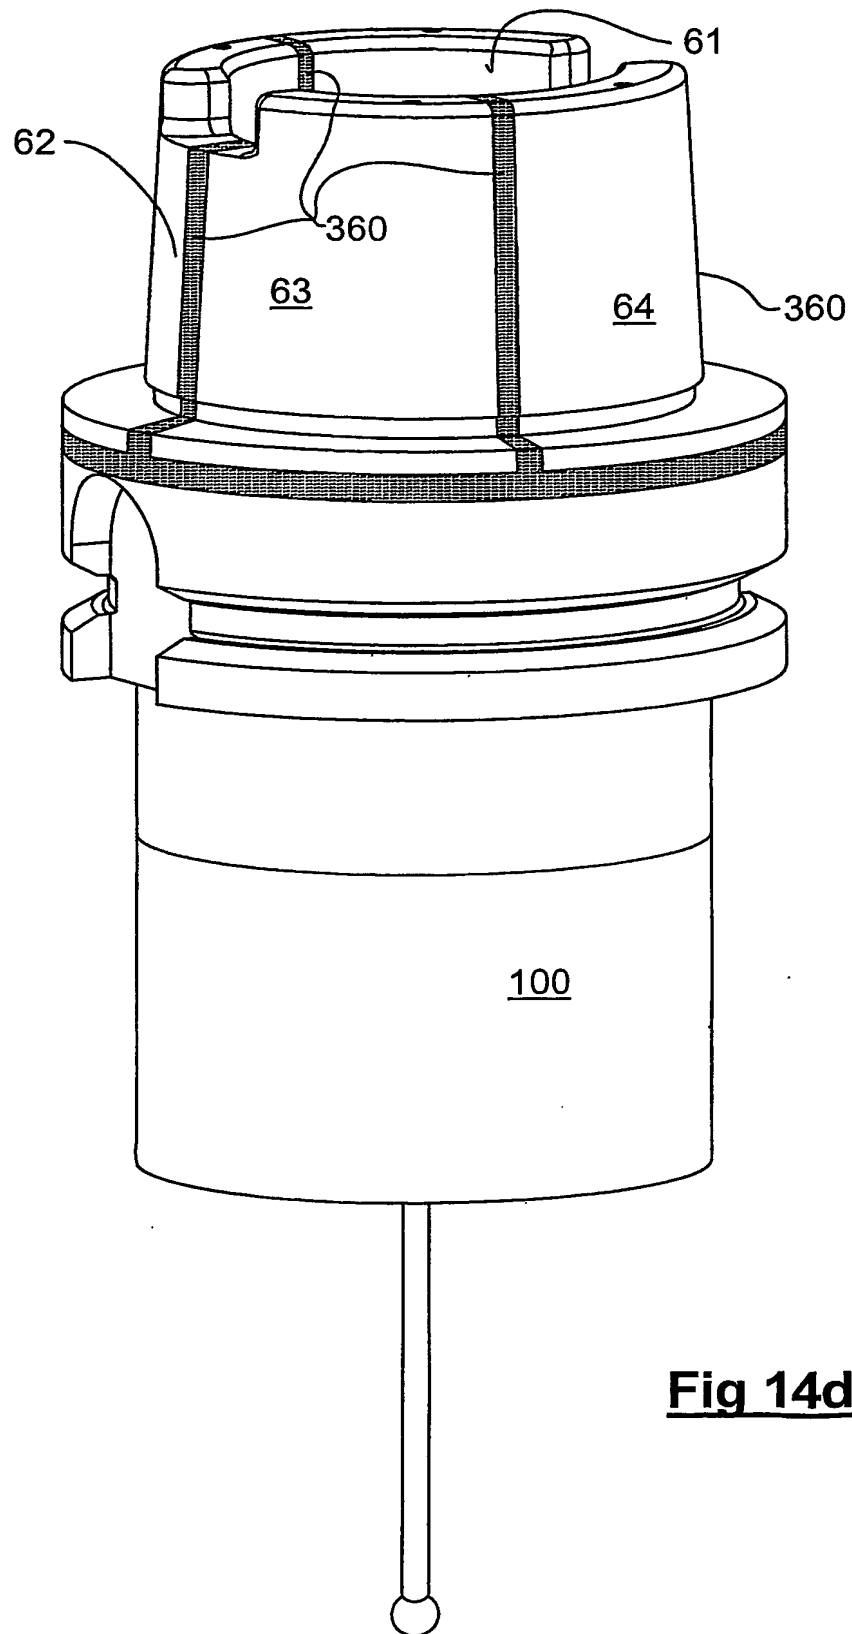


**Fig 14d**

8/16

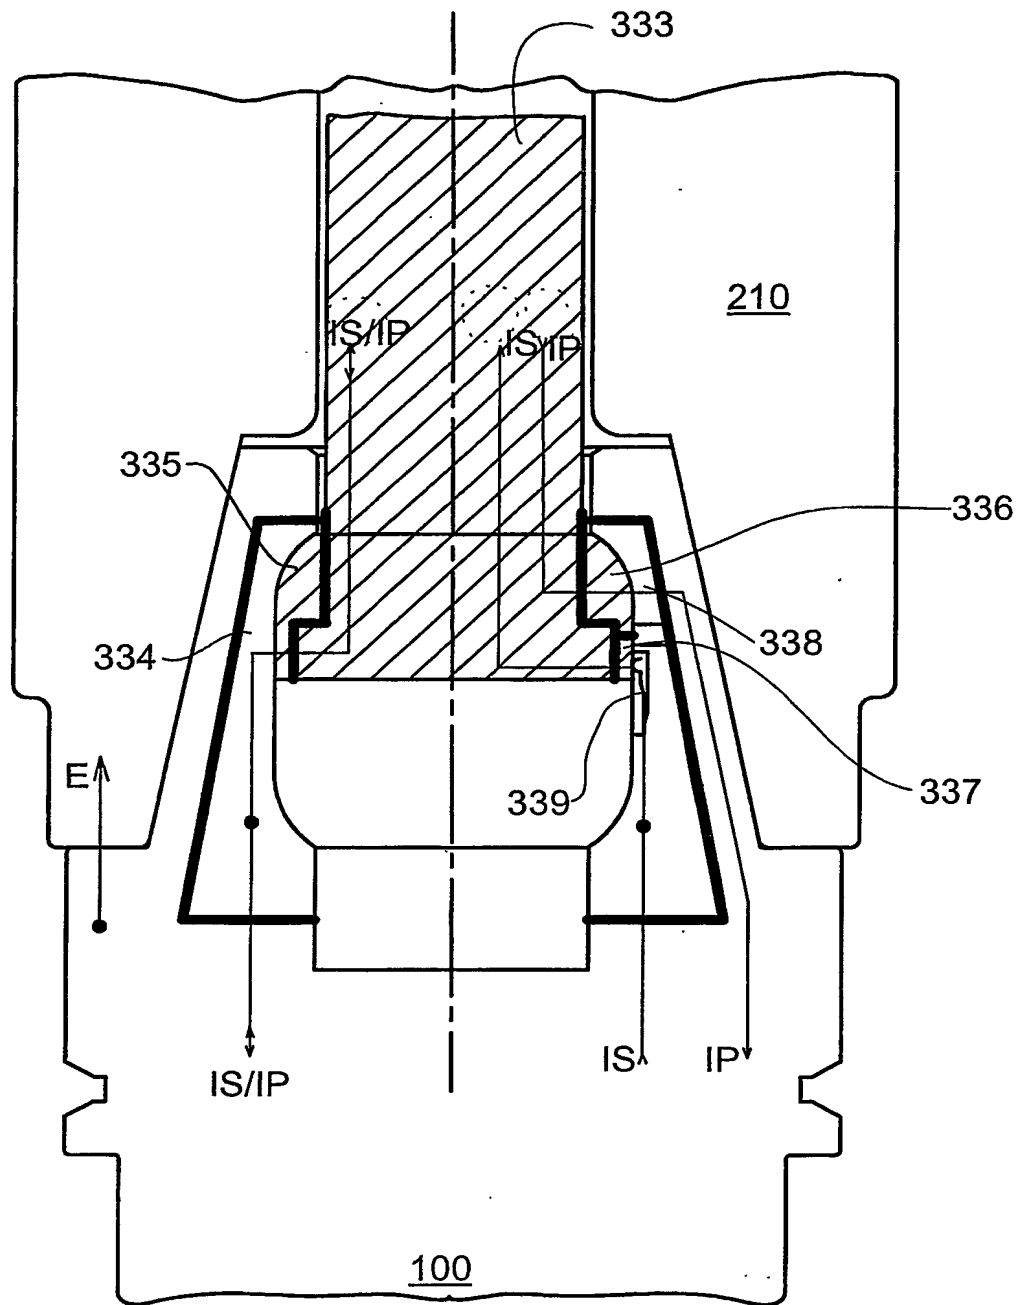


**Fig 15**

9/16

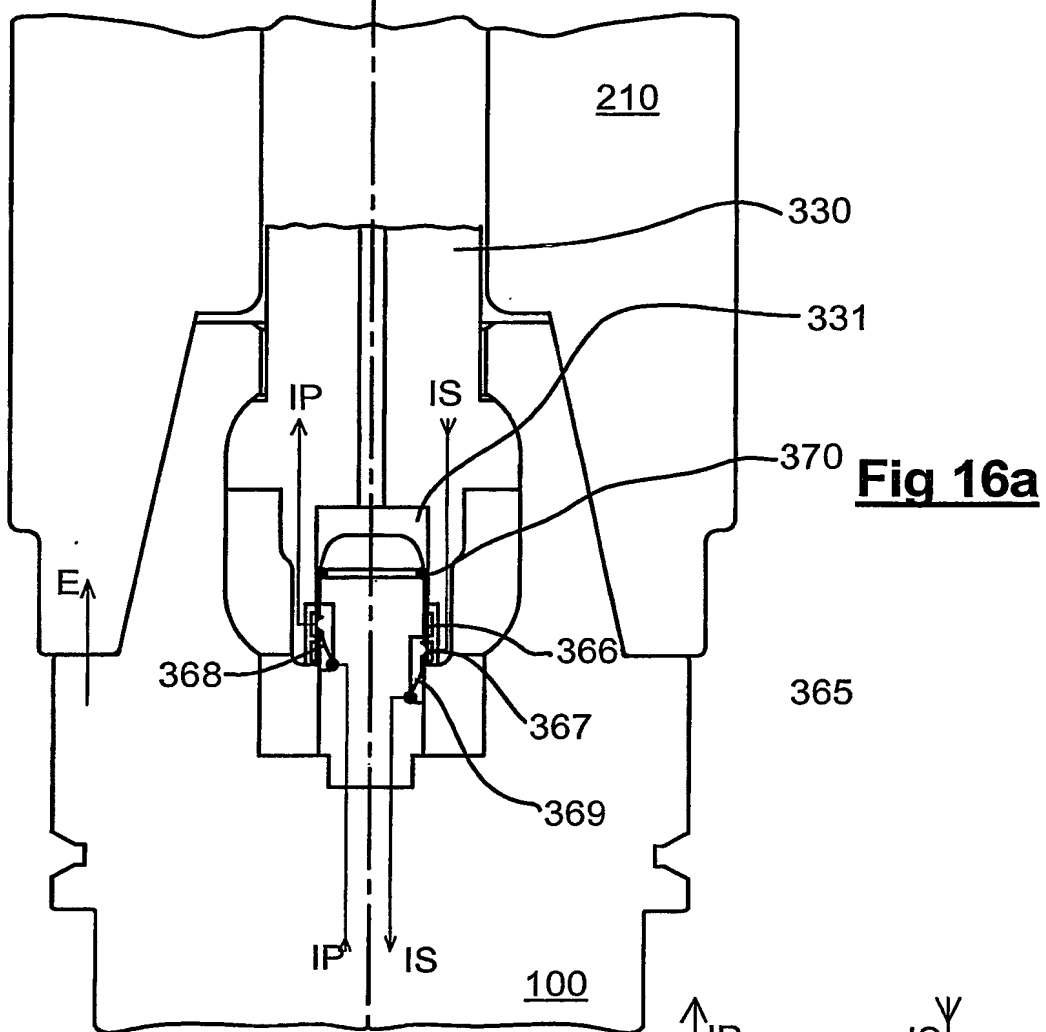


**Fig 16a**

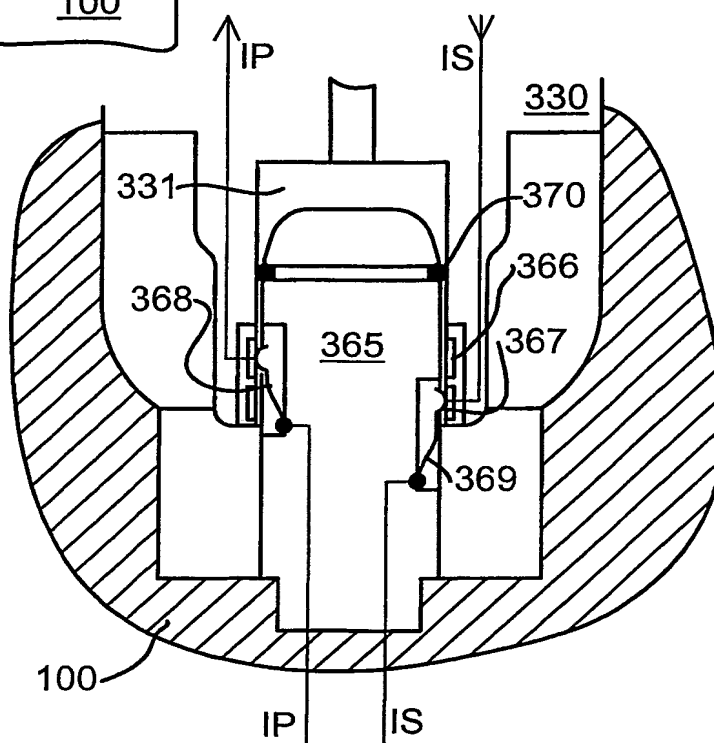


**Fig 16b**

10/16

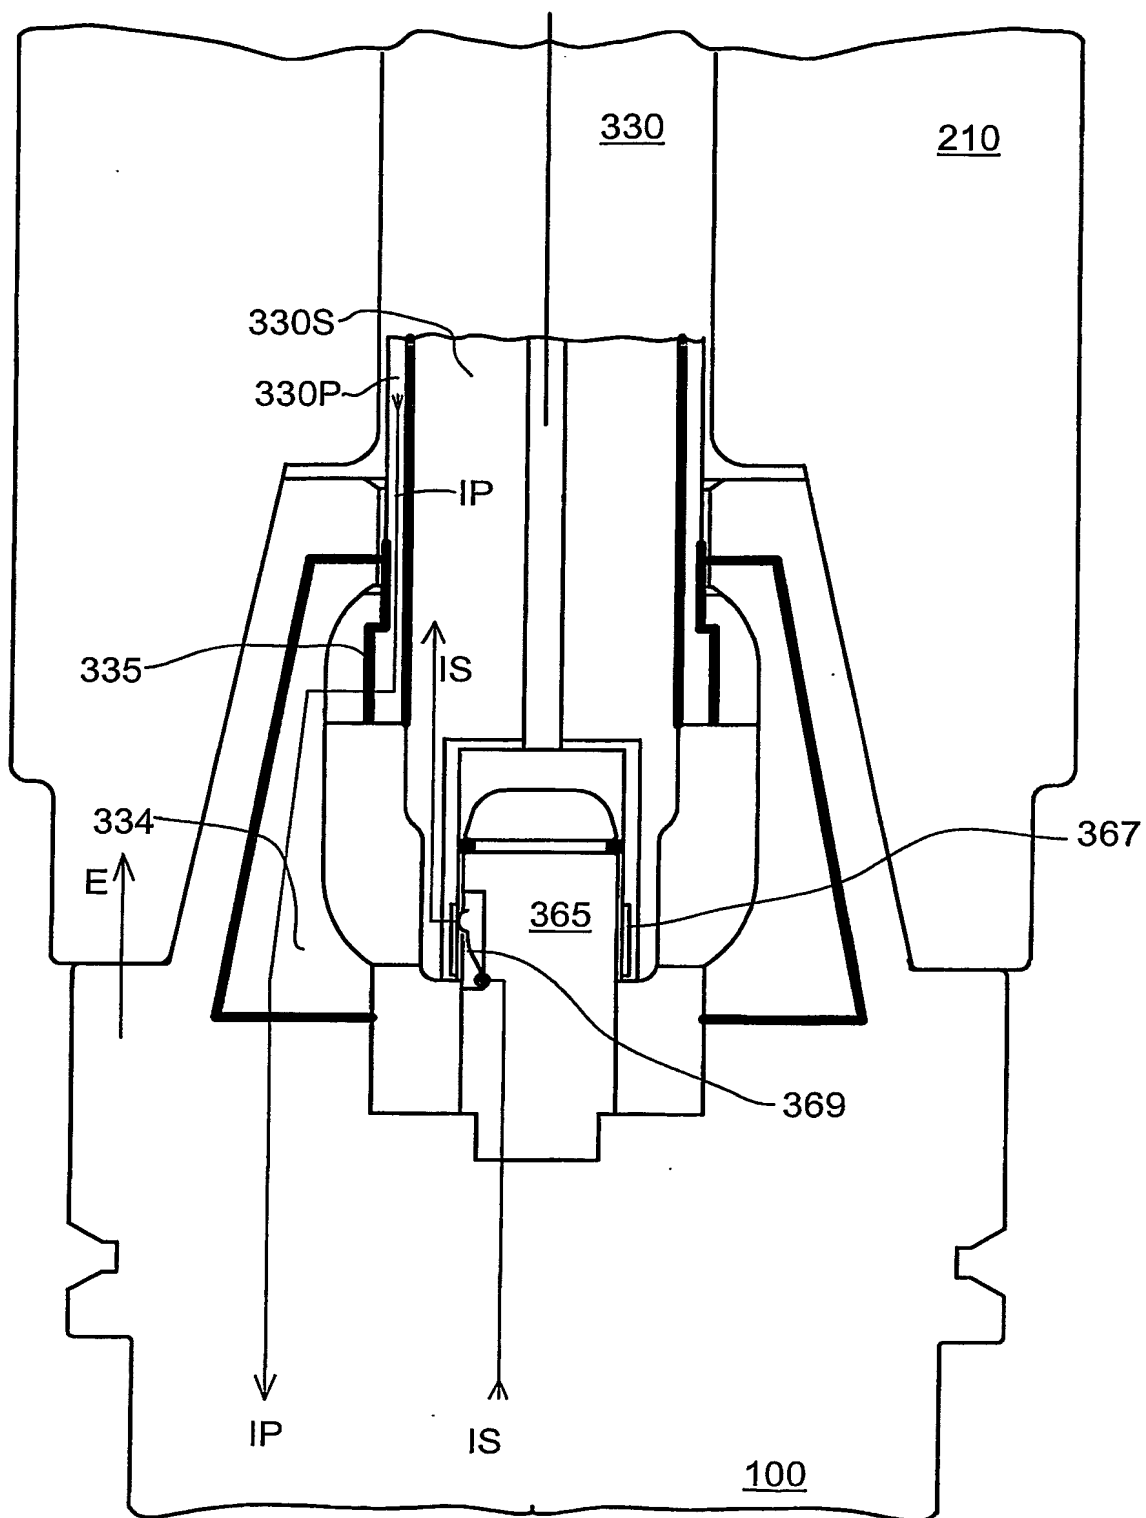


**Fig 17**


**Fig 18**

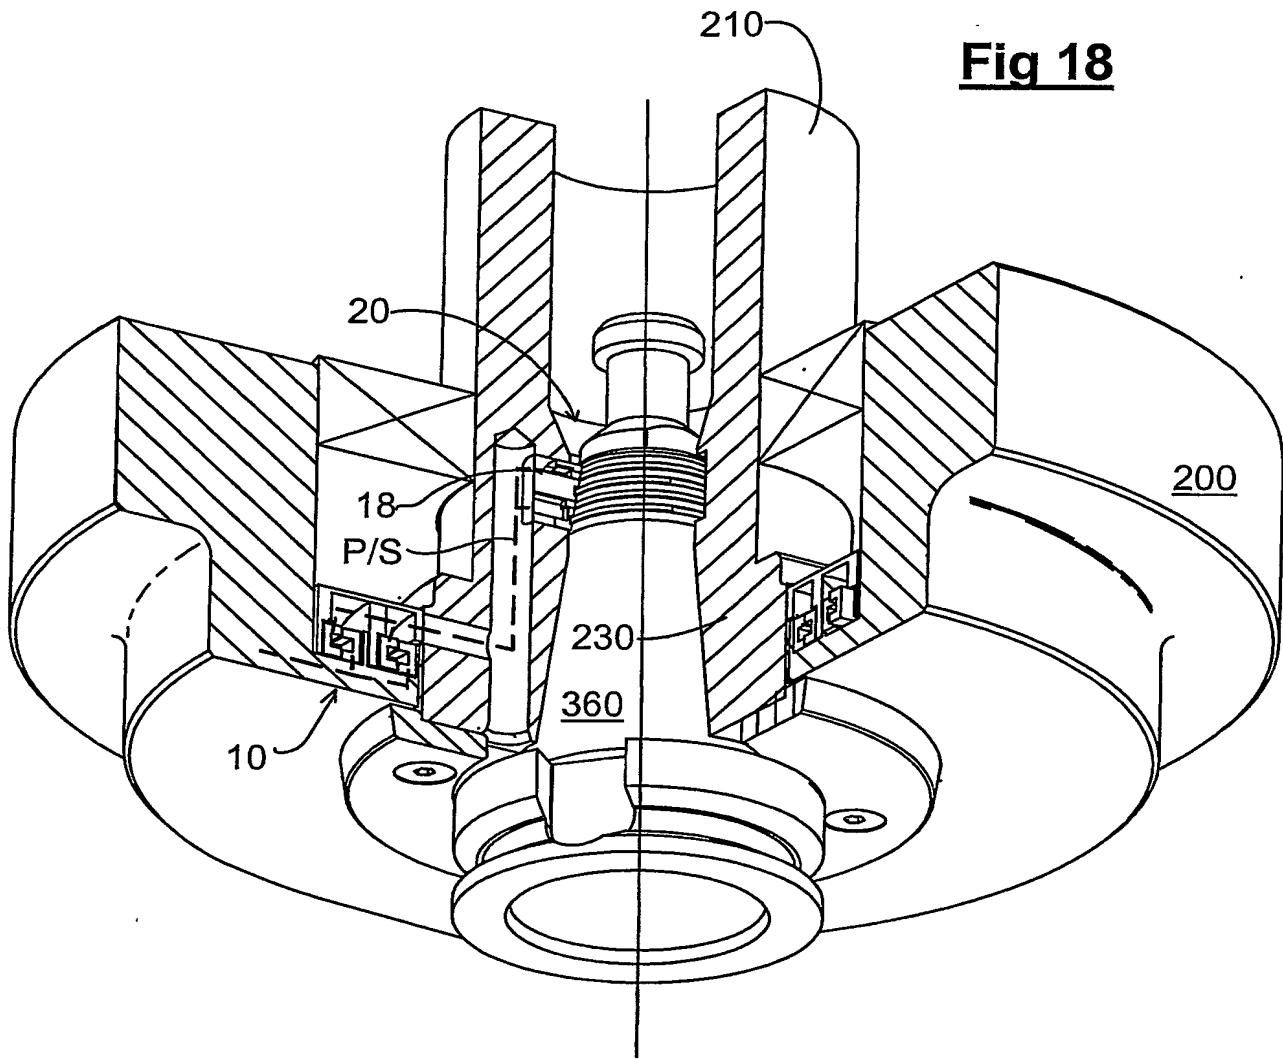

12/16

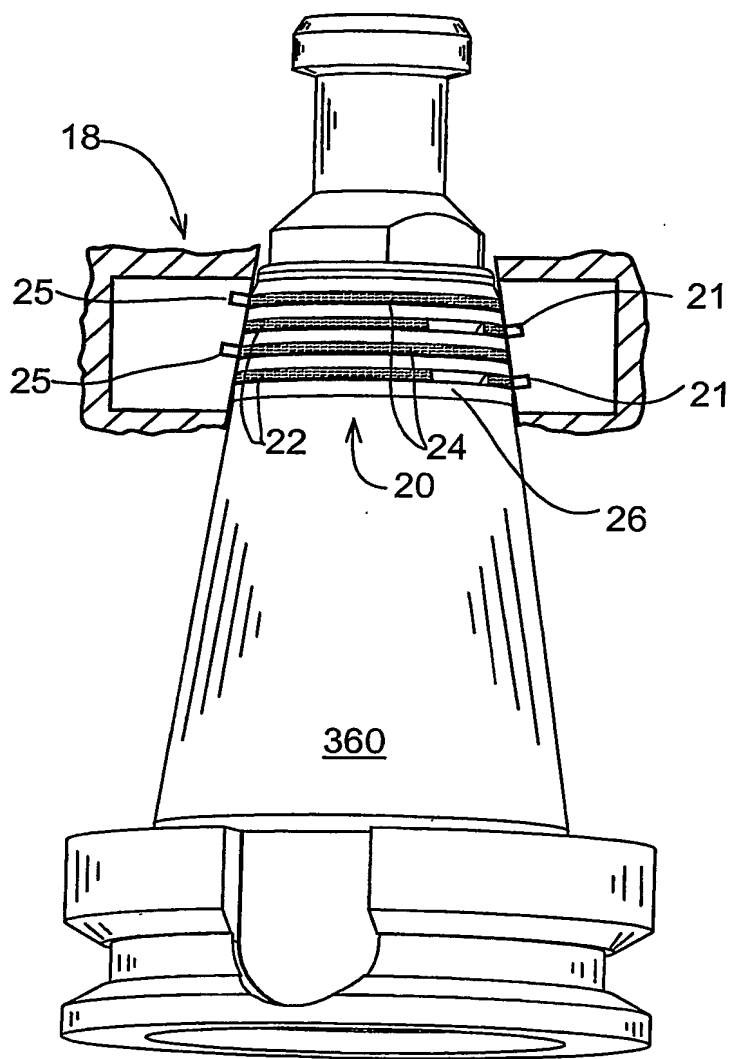


**Fig 19**

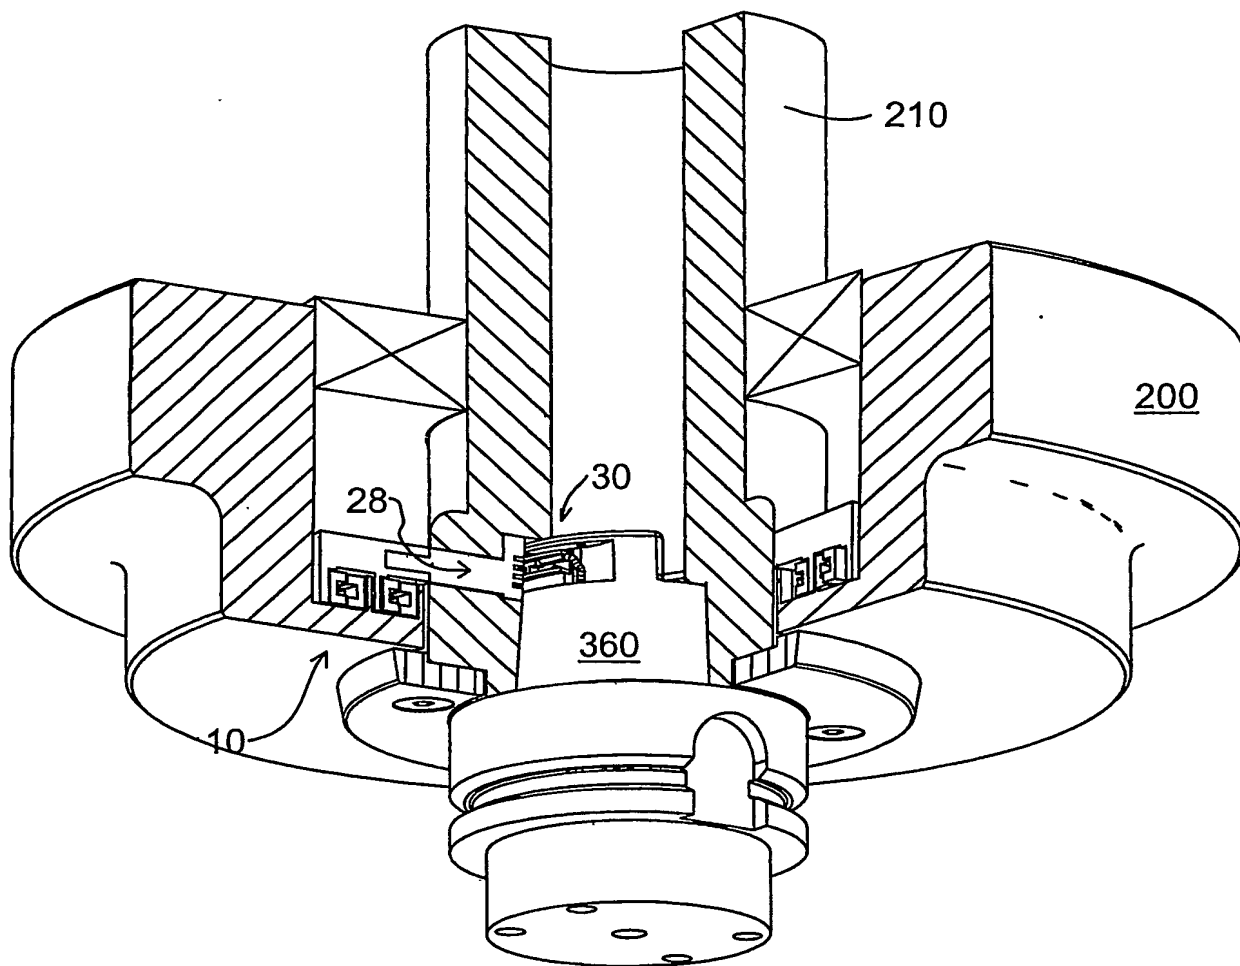


**Fig 20**

14/16

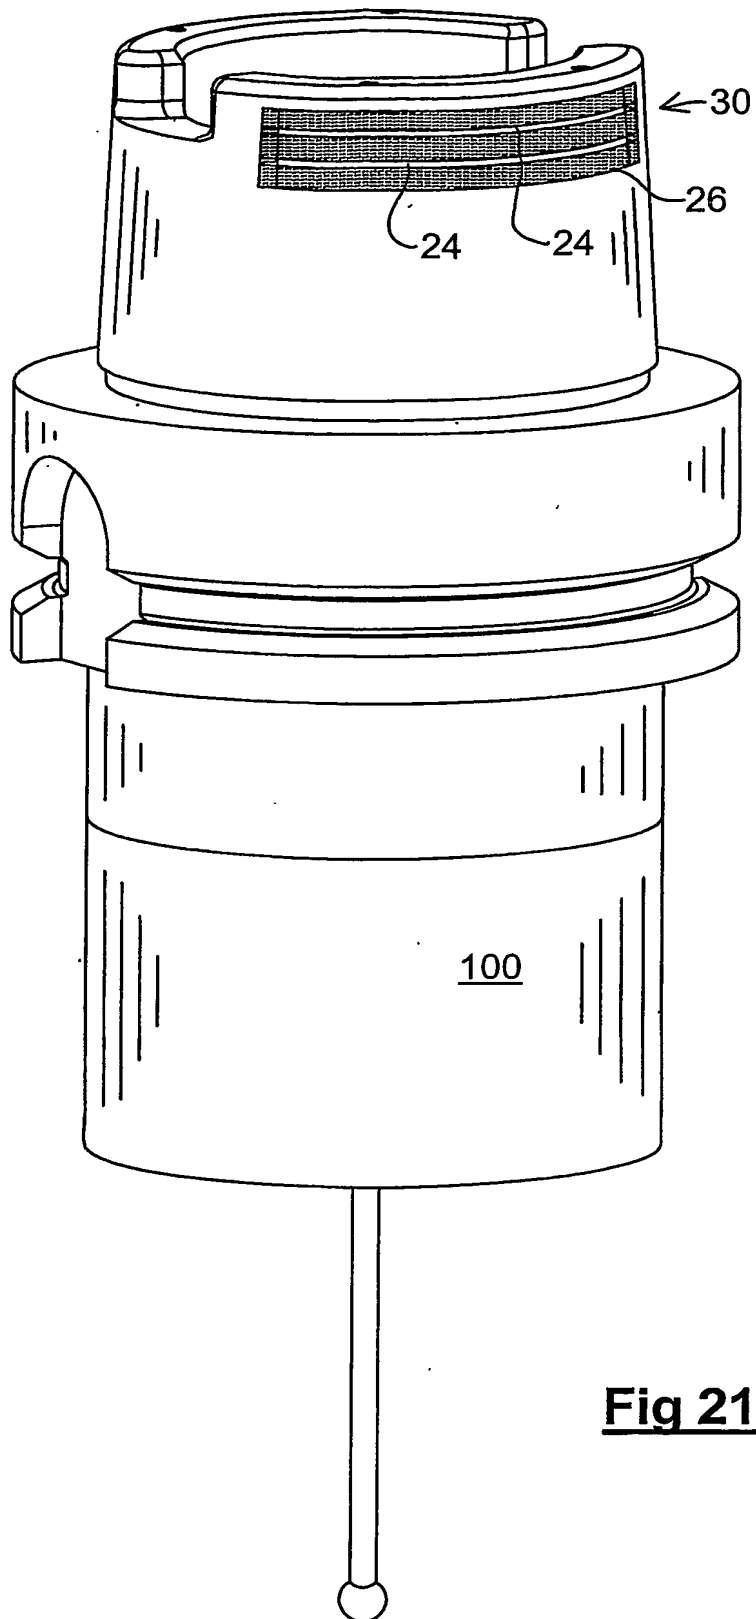

**Fig 21**

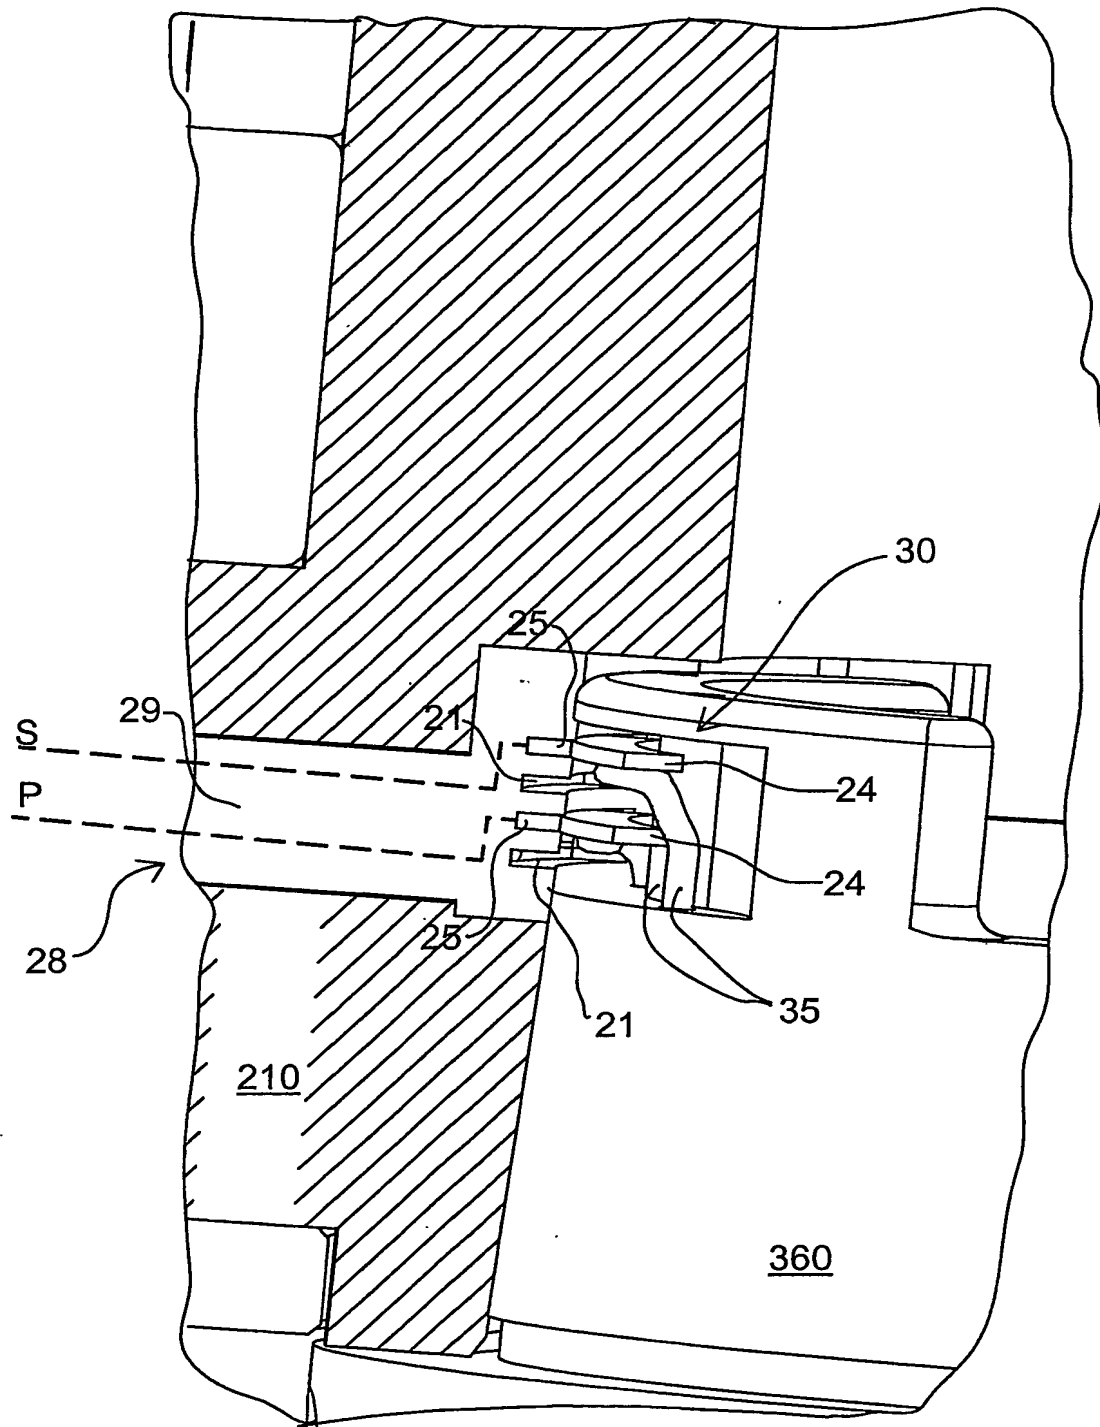

**Fig 22**



PCT Application  
**GB0301677**

